
GENERAL NOTICES

NOTICE 539 OF 2011

DEPARTMENT OF SCIENCE AND TECHNOLOGY

NOTICE OF INTENTION TO MAKE REGULATIONS ON RADIO ASTRONOMY PROTECTION LEVELS IN ASTRONOMY ADVANTAGE AREAS DECLARED FOR THE PURPOSES OF RADIO ASTRONOMY

In terms of section 37, read with section 50, of the Astronomy Geographic Advantage Act, 2007 (Act No. 21 of 2007), I, Grace Naledi Mandisa Pandor, Minister of Science and Technology, having obtained the concurrence of ICASA as required by the Act, hereby give notice of my intention to make regulations on radio astronomy protection levels in astronomy advantage areas declared for the purposes of radio astronomy, as set out in the Schedule hereto.

Interested or affected persons are invited to submit written representations on the draft regulations within sixty (60) days of the publication of these regulations to:

Ms Lipuo Mothae
Dept of Science and Technology
Building 53, CSIR Campus
Meiring Naude Road
Brummeria
Pretoria

Or

Dept of Science and Technology
Private Bag X894
Pretoria
0001

Or

E mail address lipuo.mothae@dst.gov.za

Enquiries can be made at telephone number 012 843 6463



**MRS GNM PANDOR, MP
MINISTER OF SCIENCE AND TECHNOLOGY**

SCHEDULE

1. Definitions

In these regulations any word or expression to which a meaning has been assigned in the Act has the meaning so assigned and, unless the context otherwise indicates –

"ITU" means the International Telecommunications Union;

"SPDF" means Spectral Power Flux Density;

"the Act" means the Astronomy Geographic Advantage Act, 2007 (Act No. 21 of 2007).

2. Protection levels

- (1) The origin, derivation and references for the protection levels to be applied in astronomy advantage areas declared for the purposes of radio astronomy are as follows:
 - (a) The protection levels are derived using the methodology described in ITU Recommendation ITU-R RA.769.
 - (b) The technical assumptions made in the derivation are that receiver and sky temperatures are linearly interpolated from those values found in ITU-R RA.769, and that receiver bandwidth is assumed to be 1% of the observing frequency.
 - (c) Derived protection levels, which are equivalent to threshold levels of interference for new generation radio astronomy observatories and are based on the methodology outlined in ITU-R RA.769, are depicted in Figure 1.

- (2) The protection levels to be applied in astronomy advantage areas declared for the purposes of radio astronomy shall be as follows:
 - (a) The values of the protection levels at the applicable frequencies are determined by means of a linearly piecewise function.

- (b) The said function is described by the following equations, which are to be used to calculate the required protection level at any frequency in the spectrum from 70 MHz to 25.5 GHz;

$$SARAS [dBm / Hz] = -17.2708 \log_{10}(f) - 192.0714 \text{ for } f < 2 \text{ GHz.}$$

$$SARAS [dBm / Hz] = -0.065676 \log_{10}(f) - 248.8661 \text{ for } f \geq 2 \text{ GHz.}$$

The values of (f) are to be in MHz

- (c) The function is designated as the South African Radio Astronomy Service ("SARAS") protection levels.
- (d) The SARAS protection levels are reflected in Figure 1 below, together with the ITU interpolated continuum threshold levels of interference.

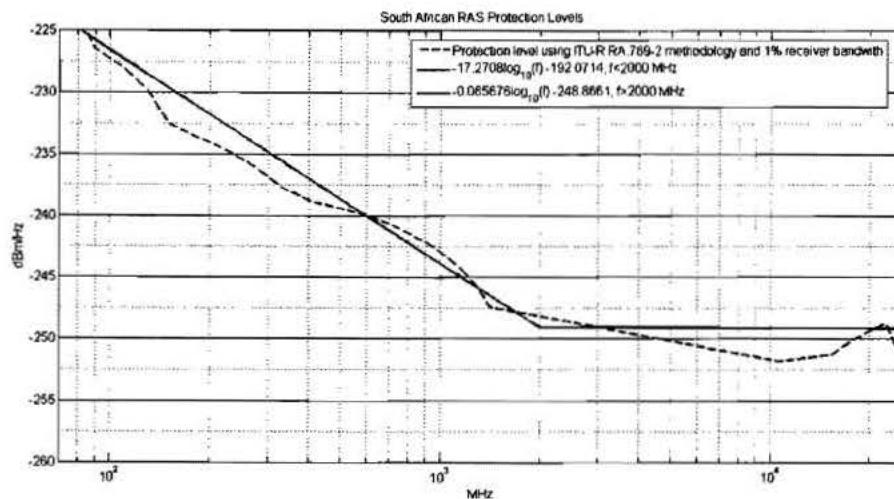


Figure 1: SARAS Protection Levels

- (e) Due to the variety of units used within the electronic communications sector, the following list of unit conversions is provided (assuming an isotropic radiator).

$$dB(W / m^2 / Hz) \rightarrow dBm : SPFD - 20 \log_{10}(f) + 10 \log_{10}(\Delta f) + 188.5$$

$$dBm \rightarrow dBm / Hz : dBm - 10 \log_{10}(\Delta f)$$

$$dBW \rightarrow dBm : dBW + 30$$

$$dBW \rightarrow dB(W / m^2) : dBW + 20 \log_{10}(f) - 158.5$$

The values of " f " and " Δf " are to be in Hz

3. Short title

These regulations are called the Radio Astronomy Protection Levels Regulations.